



## Medical Shutoff Valves with extensions





# Medical Shutoff Valves with extensions

## Valve Description:


Our valve is a full port, double seal, ball-type three piece design with forged brass body and chrome-plated brass ball. Only 1/4 turn of the handle is required to operate the valve from open to closed position. All valves are serviceable in the line and supplied clean and prepared for oxygen service as per CGA G-4.1. Valves are capped and packaged in a polyethylene bag to keep them clean. All valves are sold in box quantity packaging.

## Valve Design:

Valves are designed for working pressures up to 600 psig. The body has Teflon® material ball seats and Teflon® material stem seals. Seats/seals, lubricants and valve materials are compatible with USP oxygen, nitrous oxide, medical air, carbon dioxide, helium, nitrogen and mixtures thereof at continuous pressure of up to 600 psig and vacuum service to 29" Hg. Valves are provided with type-K copper tube extensions for connections on the pipeline.

## Features:


- Dual Gauge Port Design
- Blow out proof valve stem
- 3 Piece design for ease of maintenance
- Teflon® seats and seals
- 100% pneumatically tested
- Full port design
- Valve locking handle standard

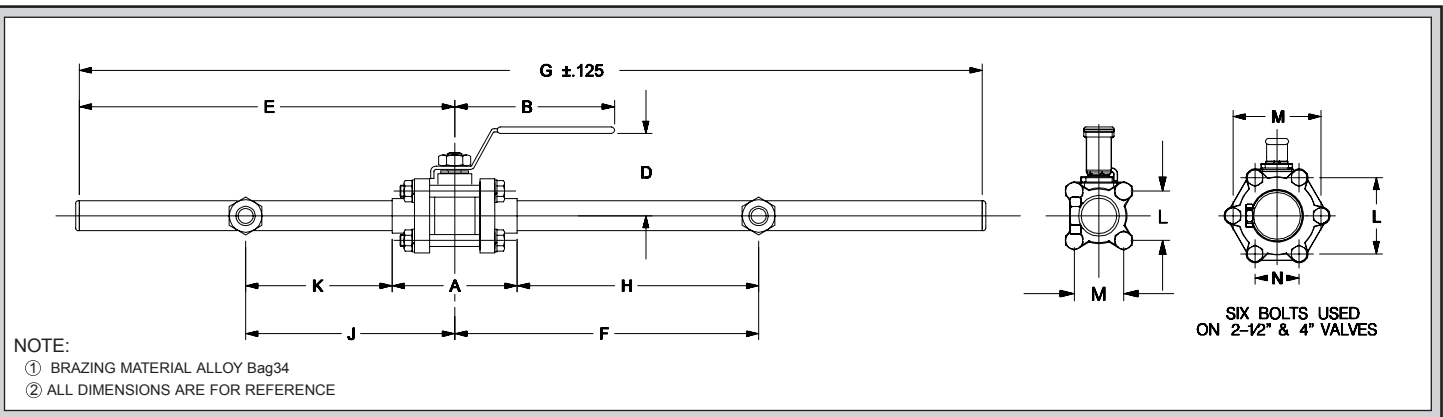

## Dimensions: (inches)

| Valve Size | Part Number | A    | B     | D    | E     | F    | G     | H    | J    | K    | L    | M    | N    |
|------------|-------------|------|-------|------|-------|------|-------|------|------|------|------|------|------|
| 1/2"       | 41050-01    | 2.62 | 3.35  | 1.69 | 7.87  | 6.37 | 21.00 | 5.06 | 2.38 | 1.07 | 1.29 | 1.29 | -    |
| 3/4"       | 41075-01    | 2.93 | 4.33  | 1.89 | 8.25  | 6.06 | 21.00 | 4.60 | 2.69 | 1.23 | 1.43 | 1.43 | -    |
| 1"         | 41100-01    | 3.44 | 4.33  | 2.05 | 8.58  | 5.87 | 21.00 | 4.15 | 2.88 | 1.16 | 1.62 | 1.62 | -    |
| 1-1/4"     | 41125-01    | 3.96 | 5.12  | 2.56 | 8.75  | 5.50 | 21.00 | 3.52 | 3.25 | 1.27 | 2.00 | 2.00 | -    |
| 1-1/2"     | 41150-01    | 4.43 | 5.12  | 2.72 | 8.87  | 5.37 | 21.00 | 3.16 | 3.38 | 1.17 | 2.25 | 2.25 | -    |
| 2"         | 41200-01    | 5.55 | 6.30  | 3.15 | 10.87 | 5.00 | 21.00 | 2.23 | 3.75 | .98  | 2.80 | 2.80 | -    |
| 2-1/2"     | 41250-01    | 6.73 | 9.06  | 4.29 | 16.00 | 4.25 | 32.00 | 0.89 | 4.25 | .89  | 4.33 | 5.00 | 2.50 |
| 3"         | 41300-01    | 7.56 | 9.06  | 4.61 | 16.00 | 4.50 | 32.00 | 0.72 | 4.50 | .72  | 4.75 | 5.50 | 2.75 |
| 4"         | 41400-01    | 9.80 | 11.73 | 7.90 | 16.00 | 7.90 | 32.00 | 3.00 | 7.90 | 3.00 | 6.38 | 7.45 | 3.73 |

NOTE: TYPICAL DIMENSIONS ONLY. NOT TO BE USED FOR CONSTRUCTION WITHOUT CONSULTING FACTORY. SUBJECT TO CHANGE WITHOUT NOTICE.

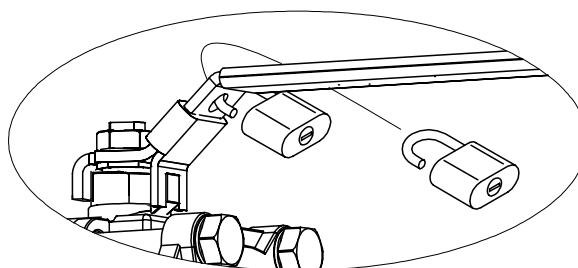

Valve Locking Handle shown

## Valve Locking Handle

| Valve Size | Part Number |
|------------|-------------|
| 1/2"       | 41050-03    |
| 3/4"       | 41075-03    |
| 1"         | 41100-03    |
| 1 1/4"     | 41125-03    |
| 1 1/2"     | 41150-03    |
| 2"         | 41200-03    |
| 2 1/2"     | 41250-03    |
| 3"         | 41300-03    |
| 4"         | 41400-03    |



U.S.Valve LLC  
812E Oregon Avenue  
Linthicum, Maryland 21090  
tel: (410)789-0999  
fax: (410)789-1009  
email: info@usvalve.com  
website: www.usvalve.com